


# TRIONCRETE (POLYURETHANE)

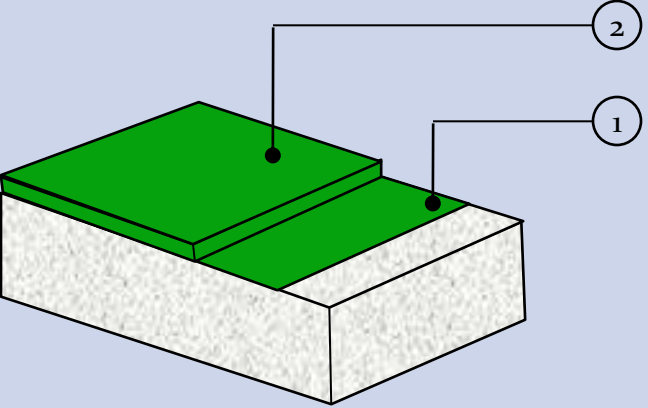

SYSTEM LAYOUT	LAYERS	FUNCTION OF LAYERS
 <p data-bbox="465 1268 778 1296">Avg. 3.0mmT - 4.0mmT</p>	<ol style="list-style-type: none"> <li data-bbox="836 819 1058 882">1. Scratch Coat                     <ul style="list-style-type: none"> <li data-bbox="836 853 1058 882">• Polyurethane</li> </ul> </li> <li data-bbox="836 1062 1058 1125">2. Body Coat                     <ul style="list-style-type: none"> <li data-bbox="836 1096 1058 1125">• Polyurethane</li> </ul> </li> </ol>	<ul style="list-style-type: none"> <li data-bbox="1278 819 1825 882">• Able to bond on damp , green hardened and iron aggregate concrete floor surface.</li> </ul> <p data-bbox="1278 1062 1392 1090">Provides</p> <ul style="list-style-type: none"> <li data-bbox="1278 1100 1489 1129">• Good abrasion</li> <li data-bbox="1278 1133 1580 1162">• High impact resistant</li> <li data-bbox="1278 1166 1566 1195">• High heat resistance</li> <li data-bbox="1278 1199 1561 1228">• Chemical resistance</li> </ul>