


EPOXY RESIN MORTAR



SYSTEM LAYOUT

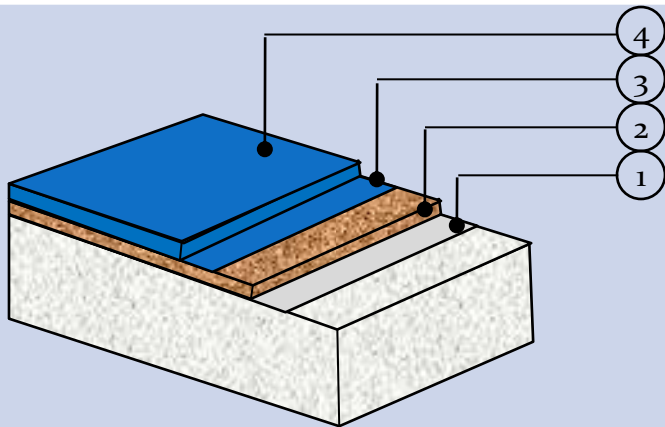

Avg. 5.0mmT - 6.0mmT

LAYERS

1. Primer
 - TR-SF, Solvent-free
2. Resin Mortar
 - TR-250, Solvent-free
3. Seal Coat
 - TR-200, Solvent-free
4. Self-Smoothing Top Coat
 - TR-200, Solvent-free (1.0mmT to 1.5mmT)
 - TR-200SF, Solvent-free (0.3mmT to 0.5mmT)

FUNCTION OF LAYERS

- Able to bond on mild damp / oil concrete surface.
- Enables moisture from ground to breathe, covers floor defects such as holes, large crack-lines, crevices, etc.
- Seal off surface of the resin mortar.
- Provides gloss and smooth finish with compressive strength of 70N/mm² (about 700kg/cm²)