
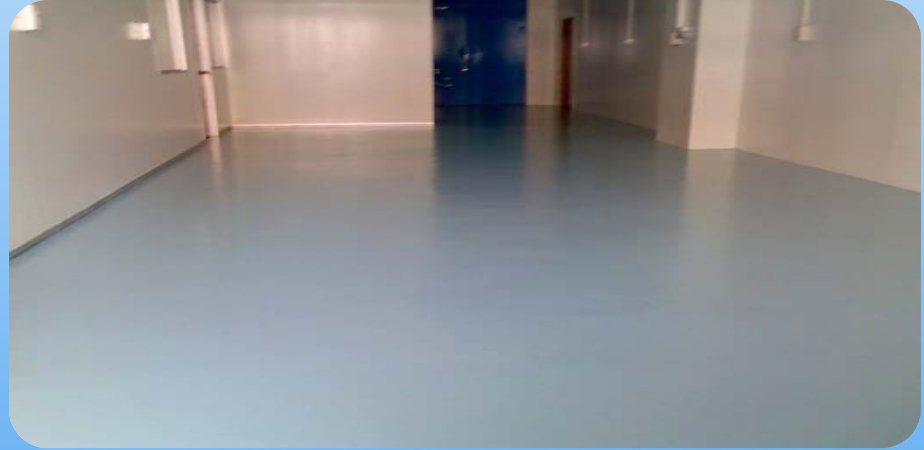


# 3 COATS EPOXY

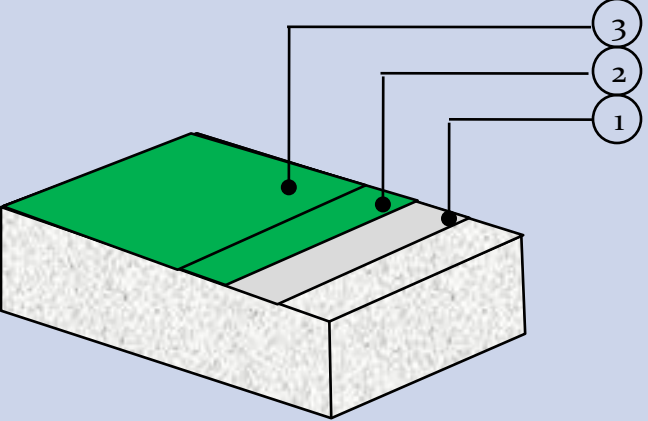

SYSTEM LAYOUT	LAYERS	FUNCTION OF LAYERS
 <p data-bbox="465 1253 788 1282">Avg. 0.12mmT - 0.4mmT</p>	<ol style="list-style-type: none"> <li>1. Primer                     <ul style="list-style-type: none"> <li>• TR-SF, Solvent-free</li> <li>• TR-130, Water-based</li> <li>• TR-180, Solvent-based</li> </ul> </li> </ol>	<ul style="list-style-type: none"> <li>• Able to bond on mild damp / oil concrete surface.</li> <li>• Act as sealer for concrete surface for dust prevention.</li> </ul>
	<ol style="list-style-type: none"> <li>2. Mid Coat                     <ul style="list-style-type: none"> <li>• TR-230, Solvent-based</li> <li>• TR-200SF, Solvent-free</li> </ul> </li> </ol>	<ul style="list-style-type: none"> <li>• Provides abrasion and mild chemical resistant with smooth finish.</li> </ul>
	<ol style="list-style-type: none"> <li>3. Top Coat                     <ul style="list-style-type: none"> <li>• TR-230, Solvent-based</li> <li>• TR-200SF, Solvent-free</li> </ul> </li> </ol>	<ul style="list-style-type: none"> <li>• Provides abrasion and mild chemical resistant with smooth finish.</li> </ul>